



1 / 2 / 3 Gang Crystal Glass Panel Touch Time / Delay Light Switch



Package:

- 1 x Touch time switch
- 2 x Screws
- 1 x User manual

Product Specification:

Dimension: 86mm*86mm*37mm

Material: Crystal Glass Panel

Operating Voltage: AC110V~250V/50Hz/60Hz

Maximum Current for Each Gang: 5A

Maximum Power for Each Gang: 1000W/220V or 600W/120V

Self Consuming Power: Less than 0.1mW

Operating Environment: -30~70 Centigrade; Less than 95%RH

Lifelong: 100,000 Times of Operation

Installation is as same as normal light switch, so does not require Negative line; Replace traditional wall switch completely and smoothly.

Using with all types of lights including Incandescent lamps, Halogen lamps, Fluorescent lamps, Energy saving lamps

Note: The switch is not suitable for LED lamps or inductive ballast fluorescent, or any lamps with load power lower than 15W.

Switch Operation:

Touch the control icon on the switch surface, turn on the lamp; Touch the icon again, turn off the lamp.

Press the button of "5min" or "30min", the red light will flash for twice and then keeps lighting, which means success of setting.

Press the icon of "5 min" for timing 5 minutes Off; Press the icon of "30 min" for timing 30 minutes Off.


Set up other time delay according to the need, by press the button of "5min" or "30min" repeatedly, the delay time will be cumulate automatically.

The lamp will turn off automatically if the cumulating time is up. The longest delay time is up to 4 hours.


Note: press "5min" for 5 seconds to cancel setting time, and then the red flash light will be off.

Installation:

1. Shut off the power to the circuit and remove the switch cover with screwdriver.

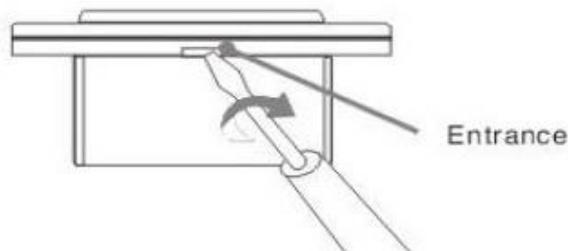

2. Connect the wires to the screw terminals.

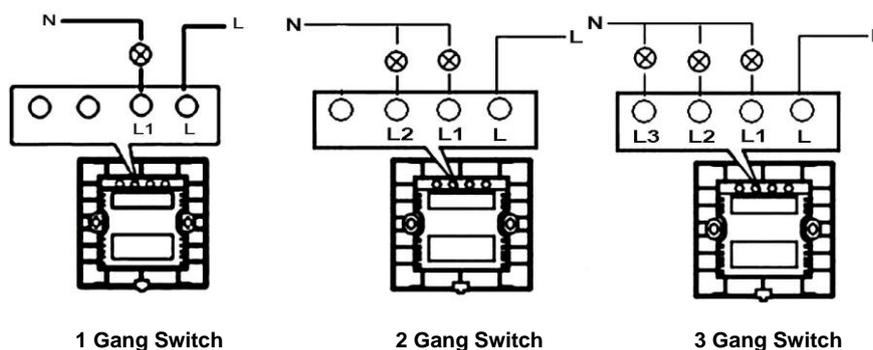


1 Gang Switch


2 Gang Switch

3 Gang Switch

3. Fix tightly the switch to internal box with two screws.

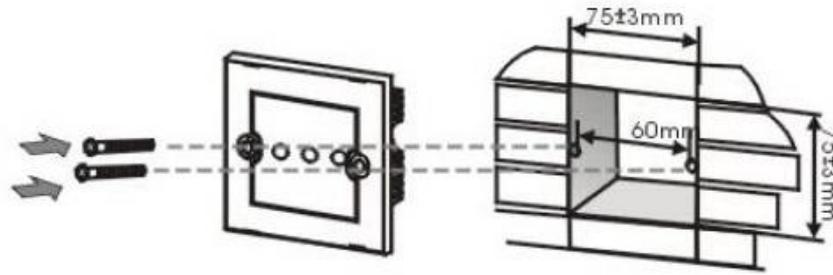

4. Fix the cover.

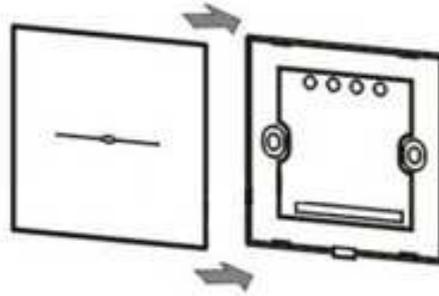

Warning:

1. Please shut down power before installation and dismantlement.
2. Doing the Installation and dismantlement must be professional.
3. Check the circle condition before installation.
4. Pay an attention to the lamp introduction, since some lamps have special condition.
5. Dismantle the product to avoid ruin as the circuit is testing.
6. Avoid shock, wateriness, hot, and knocking when installing and using the product.
7. Forbid wet cloth, chemistry and scour water when cleaning.
8. Over loading is forbidden.
9. Circuitry which the products installed in should be set properly.
10. Do not use metal box for installation, it maybe shorten the distance of remote control or cause electric shock.
11. Mount box should be standard "86" style and the dimensions at least 75mmx75mmx35mm.